


Where F3 and F4 are indicated, use the detail above, on both sides of the truss. Special attention to be given for minimum screw spacing and edge distance.

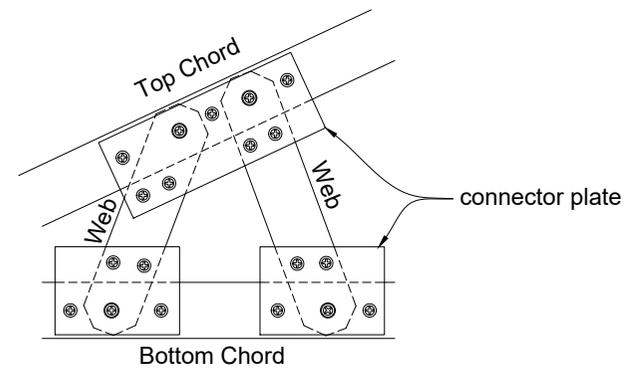

A screw connector plate is required where values greater than F4 are indicated. Use the detail above, on both sides of the truss, when F5 and F6 are indicated. Special attention to be given for minimum screw spacing and edge distance.

Note: Consult with Engineer for each connection

### Truss Joint Connections with Extra Screw Requirements



JOB DETAILS

Roof Framing Details: Truss Joint Connections with Extra Screw Requirements

INDEX

FC-R3

REVISION

0